



12CN860

Neodymium Triaxial Transducer

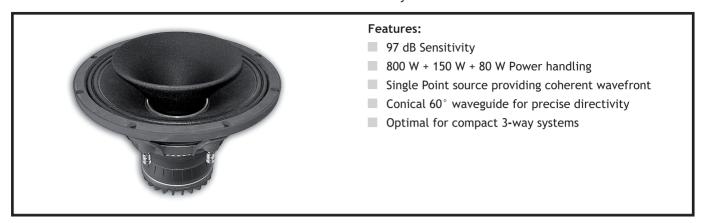


SPECIFICATIONS

APPLICATION	Transd	ucer		
Nominal impedance	Ohm	8/8 or 16		
Power handling AES noise	W	800		
LOW FREQUENCY UNIT				
Sensitivity (1W/1m)	dB	97		
Frequency response	Hz	40 - 22000		
Voice coil diameter	mm	101.6		
Voice coil material		Cu		
Voice coil winding depth	mm	19		
Magnet gap depth	mm	10		
Basket		Cast Aluminum		
Effect. diaphragm diameter D	mm	239		
THIELE - SMALL PARAMETERS				
Resonance frequency	Fs	Hz	52	
DC resistance	Re	Ohm	5.7	
Mechanical Q factor	Qms		4.5	
Electrical Q factor	Qes		0.23	
Total Quality factor	Qts		0.22	
Equivalent volume	Vas	L	37	
Moving mass	Mms	kg	0.072	
Mechanical compl.	Cms	mm/N	0.13	
BL factor	BL	Tesla m	24.2	
Effective piston area	Sd	m²	0.0449	
Max. linear excursion	Xmax	mm	± 4.5	
SPECIFICATIONS HIGH/MIDDLE FREQUENCY				
Middle range (AES)	W	150		
Peak Power	W	1000		
High range (AES)	W	80		
Peak Power	W	320		
Sensitivity 1W/1m	dB	113		
Middle frequency range	Hz	700 -7000		
High frequency range	Hz	6000-22000		
Recommended crossover	Hz	800, 6.300		
Voice coil diameter	mm	44.4 (1.75") high		
		90 (3.5")	middle	
Magnet material		ymium		
Flux density	Т	2		
Voice coil material	Coppe	Copper Clad Aluminum		
	(2 Layers in-and outside of the VC)			
Voice coil former	Kapton TM			
Diaphragm material	Polyester			

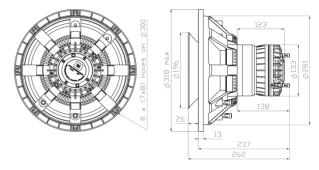

Frequency response measured 1W (2.83V) at 1m in a closed enclosure of $50\ \text{litre}$.

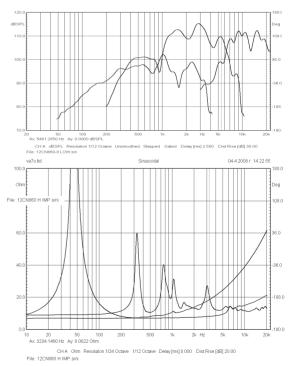

MOUNTING INFORMATION		
Overall diameter	mm	318
Mounting holes diameter	mm	8 x (7 x 8)
Bolt circle diameter	mm	300
Baffle cut-out diameter	mm	284
Overall depth	mm	263
Net weight	kg	8.55